

MICHELIN MULTIBIB



FLAT, WIDE CROWN

- Reduced wheel slip
- Consistent, regular wear

TREAD BAR'S DESIGN

- Better self-cleaning

FOOTPRINT

- Up to 10% increase in footprint
- Optimised contact pressure



FLEXIBLE CASING

- Enhanced comfort especially for tractors without suspension on front axle



**BE MORE EFFICIENT
BOTH IN THE FIELD
AND ON THE ROAD**

MICHELIN MULTIBIB, THE MARKET REFERENCE **

- More than 1 tyre on 3, on the field, is a MICHELIN MULTIBIB**
- Technical approval with 100% of OEM
MICHELIN Multibib lead is compliant with all OE permitted leads



MICHELIN

 agro.michelin.com

 www.youtube.com/user/AgMichelin

 agro.michelin.com

 www.youtube.com/user/AgMichelin



MICHELIN

*Source : Michelin test and research center (Ladoux), compared with a MICHELIN XM 108 tyre
**Source : Michelin internal and pool manufacturing, OE + RT market, on the 65 series tyres range, from tractors to 80 to 200 HP



LONGER SERVICE LIFE FOR INCREASED MILEAGE

MICHELIN MULTIBIB, HIGH TRACTION CAPACITY SAVING TIME AND MONEY

AVAILABLE SIZES

Ø (inches)	Tyre size	CAI	specifications				Recommended rim	Interne volume 75 % (liters)	Tread depth (mm)
			S (mm)	D (mm)	R' (mm)	CdR (mm)			
16	320/65 R16 107D TL	494658	300	827	368	2452	W8 - W10L - W8L - W9	65	29
20	440/65 R20 128D TL	675464	445	1090	475	3260	W14L - W13 - W15L	157	44
24	420/65 R24 126D TL	171560	392	1156	508	3416	W12 - 11 DW12 W11	159	38
	440/65 R24 128D TL	426389	439	1187	529	3519	DW14L DW13 - DW15L - W13 - W14L - W15L	178	44
	480/65 R24 133D TL	531721	483	1240	546	3667	DW15L - DW14L - W14L - W15L	218	46
	540/65 R24 140D TL	097057	532	1312	573	3873	DW16L - DW18L - W16L - W18L	287	48
28	420/65 R28 135D TL	778211	390	1238	558	3680	W11 - W12	177	44
	440/65 R28 131D TL	386212	437	1291	579	3833	DW14L - DW15L - W13 - W14L - W15L	198	43
	480/65 R28 136D TL	897574	476	1339	596	3970	DW15L - DW14L - W14L - W15L	242	45
	540/65 R28 142D TL	792274	529	1427	630	4223	DW16L - DW18L - W16L - W18L	318	48
30	540/65 R30 143D TL	223153	527	1472	648	4353	DW16L - DW18L - W16L - W18L	333	48
34	540/65 R34 145D TL	712064	530	1574	693	4655	DW16L - DW18L - W16L - W18L	364	48
	540/65 R34 152D TL	214036	530	1590	709	4716	DW16L - DW18L - W16L - W18L	364	48
	600/65 R34 151D TL	557189	594	1654	732	4897	DW20B (A) - DW18L - W18L	463	54
38	540/65 R38 147D TL	114518	525	1654	745	4965	DW16L - DW18L - W16L - W18L	394	48
	600/65 R38 153D TL	228045	595	1768	779	5229	DW20B (A) - DW18L - W18L	500	53
	650/65 R38 157D TL	292904	646	1819	801	5380	DW20B (A)	602	56
42	650/65 R42 158D TL	167733	638	1931	858	5722	DW20B (A)	647	57

For the load / pressure table, please refer to the MICHELIN AG technical documentation, downloadable from our website <https://agro.michelin.com/>.

MICHELIN ADVICE

MACHINE #1

FRONT PRESSURE (bar/psi)

REAR PRESSURE (bar/psi)

MACHINE #2

FRONT PRESSURE (bar/psi)

REAR PRESSURE (bar/psi)




UP TO 35%

LONGER SERVICE LIFE*

- NEW RUBBER MIX
- FLAT CROWN
- "D" SPEED RATED (65 KM/H)**

ROBUST SHOULDERS
- Maximum traction capacity

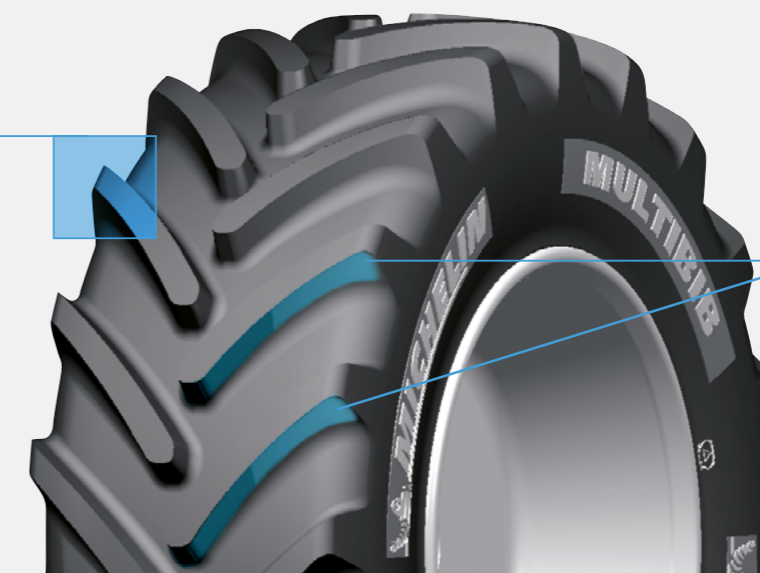

DEEP TREAD PATTERN
- Up to 57mm deep

PRODUCTIVITY



Capable of speeds up to 65 km / h**

SOIL PROTECTION



Great performance in the field and on the road

COMFORT



Excellent road handling

MICHELIN MULTIBIB, HIGH TRACTION CAPACITY
SAVING TIME AND MONEY